


NATURA 94

- Construction depth 94 mm
- Havier profile guaranteeing better thermal insulation and strength qualities
- Four-layered-adhesive wood profiles warrant maximum cohesiveness and freedom from torsion
- Various wood types such as: spruce, pine, meranti and oak
- Centre sealing system (2-level seal) delivers ideal insulation values and helps reduce heating costs and external noise
- Glazing rebate depth of 23 mm prevents from condensation inside the glass
- Frame drip-moulding of modern construction (with additional seal) prevents the occurrence of a thermal bridge in the lower part of the window and in-leak
- Sash drip-moulding protects the lower part of sash against weather conditions
- Windows are equipped with Siegenia-Aubi fitting with safety points for better resistance to burglary
- Safety catch to prevent windows from faulty handling
- Long-lasting endurance thanks to fine surface finish: three-layer surface finish system in-depth impregnation, colour impregnation, high pressure coating
- Suitable for low-energy buildings and passive houses

$$U_w = 0,7 \text{ W/m}^2\text{K}$$

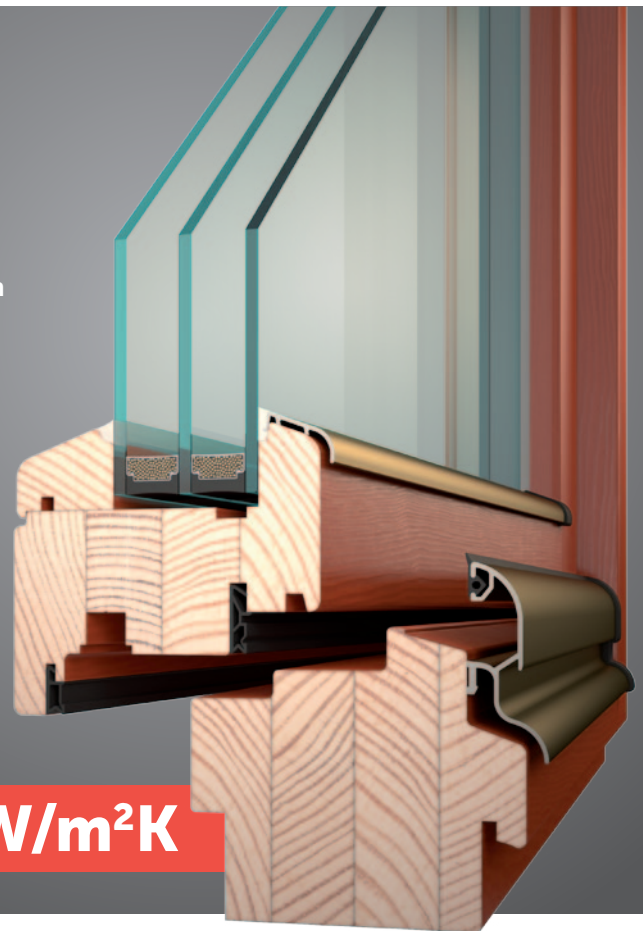

TECHNICAL DATA

Profile		Natura 94
Dimension (mm)	construction depth	94
	view width frame/sash*	123
Sealing	System	centre
	Quantity	2
Colour of sealing	black	•
	white	•
	ocker	•
	brown	•
Safety points		2
Thermal insulation	$U_g = 1,1$	
	$U_g = 1,0$	
	$U_g = 0,6$	0,77
	$U_g = 0,5$	0,7
Areas of application	Fixed	•
	Turn and turn/tilt	•
	Tilt	•
	Balcony door	•
	Balcony door with ALU sill	•
	Outward opening balcony door	•
Building form	Tilt and slide door	•
	Entrance door	•
	Standard - rectangular	•
Building form	Special - skew	•
	Standard - arched	•

NATURA 94

COLOUR TONES**

SPRUCE, PINE







MERANTI



OAK



INTERIOR SPRUCE, PINE (only for combination with RAL colour outside)

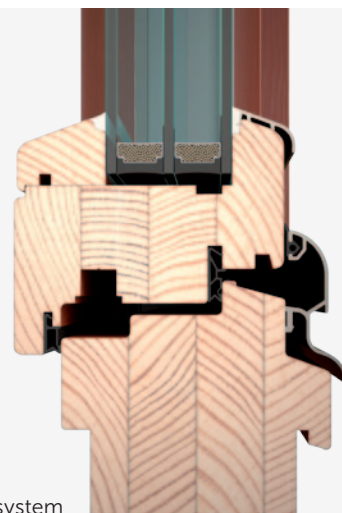

- * View width for basic profiles
- ** Illustrations of colour tones are only orientational.

Regional partner